



# Future-proof the way you work



### **Unified Cloud Connection**<sup>\*1</sup>

You only need to sign in once to connect to multiple cloud services, such as Microsoft Teams, from the MFP. Applications can also be easily downloaded from the cloud. Updates are clearly displayed, so you're always using the latest version of services.

### **Solid Security**

The MFP has multiple levels of security to keep the device—and your precious data—secure. When booting up, the MFP checks for any anomalies in the BIOS firmware. If it finds a problem, it aborts the startup. If there are other firmware-related issues, the MFP will attempt recovery to protect the system.

### **Link Mobile Devices**

Mobile devices installed with the Sharpdesk Mobile application<sup>\*2</sup> can connect directly to the MFP for printing or downloading scanned data. The MFP can also be equipped with AirPrint and the Sharp Print Service Plugin. It's a smoother way to get the job done.

### Wireless LAN Connection\*1

The MFP works with the 5 GHz band. This ensures minimal radio interference and stable high-speed communications. The MFP also supports Wi-Fi Protected Setup™. This makes it easy to connect the MFP to a secure wireless LAN without having to enter an SSID and security key.

### **All the Needed Finishing Options**

The MFP meets all common office needs with a variety of finishing options. Its folding unit handles various types of folds without taking up much space—it attaches to the MFP's paper output section. You get seamless output from printing to finishing.

## smart business partner

### 10.1-Inch Full-Flat Touchscreen

With a variety of functions accessible via simple, intuitive icons, MFP operation is smooth and easy.

### **On-Screen System Information**

The control panel shows the state of your MFP, displaying current operation and notifications for things like paper, toner, and maintenance.

### **Speedy RSPF**

The RSPF (reversing single pass feeder) efficiently feeds in either one- or two-sided originals—in batches of up to 100 sheets. With scanning speeds of up to 80 opm<sup>\*3</sup> (one-sided), the MFP can complete large jobs with ease and efficiency.

### **Smart Scanning**

Simply tap the Auto Set button and the MFP will automatically determine the optimal resolution, gradation, and compression rate for your scan jobs. It also automatically reorients pages right side up and corrects any skewed sheets.

### **Eco-Friendly Design**

Despite its many functions, this MFP achieves superb energy efficiency. For example, the use of low-temperature-fusing toner results in vastly reduced energy consumption for the MFP.

### **Remote Firmware Updates**

The MFP's firmware can be remotely updated—without the need for service operation—via a firmware update service. That way you're always using the latest system for your MFP.


\*1: In some countries/regions, optional equipment is required. \*2: Availability varies by country/region. \*3: Originals per minute; when feeding A4 (8<sup>1/2</sup>" x 11") sheets.

### **PROFESSIONAL-QUALITY IN-LINE FINISHING OPTIONS**


A range of finishing options work to automate time-consuming finishing tasks. Options are available to suit a variety of workplaces and applications.

		BP-FD10 Folding Unit	BP-FN11 Finisher	BP-FN13 Finisher	BP-FN13 Finisher	BP-FN14 Saddle Stitch Finisher	BP-FN14 Saddle Stitch Finisher	BP-FN15 Finisher	BP-FN15 Finisher	BP-FN16 Saddle Stitch Finisher	BP-FN16 Saddle Stitch Finisher
					+		+		+		+
					BP-FD10 Folding Unit		BP-FD10 Folding Unit		BP-FD10 Folding Unit		BP-FD10 Folding Unit
Features	Stapling		√	✓	✓	✓	✓	√	✓	√	√
	Stapleless stapling		√					√	√	√	$\checkmark$
	Manual stapling		√					√	√	√	√
	Punching*1		√	√	1	√	1	√	√	√	√
	Saddle folding					√	√			√	√
	Saddle stitching					√	1			√	√
	Half-folding	✓			1		√		√		√
	Z-folding	√			√		1		√		√
	Z-folding + Stapling								√		√
	C-folding	√			1		1		√		√
	Accordion folding	√			√		√		√		√
Paper capacity*2	Finisher trays*3	-	500 sheets	1,250 sheets	1,250 sheets	1,250 sheets	1,250 sheets	3,250 sheets	3,250 sheets	3,250 sheets	3,250 sheets
	Folding unit tray	200 sheets	-	-	100 sheets	-	100 sheets	-	100 sheets	-	100 sheets

\*1: Requires optional punch module. \*2: A4 (8 1/2" x 11"), 80 g/m<sup>2</sup>. \*3: Max. paper capacity of the finisher including the top tray.

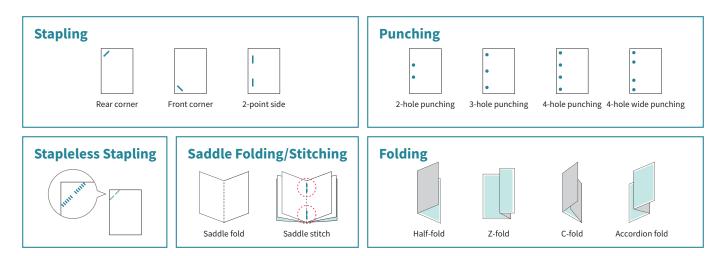

### SYSTEM CONFIGURATION

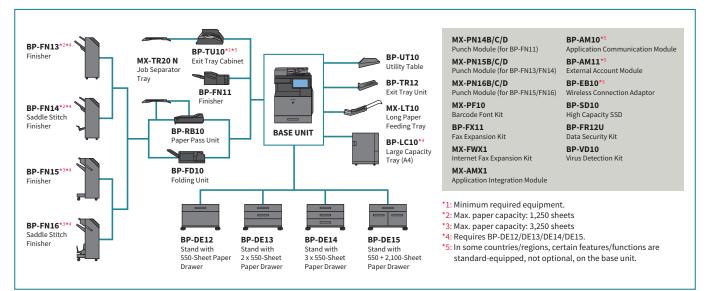

### SPECIFICATIONS FOR OPTIONAL EQUIPMENT

#### MX-TR20 N Job Separator Tray

Paper size	SRA3 to A6*1 (12" x 18" to 5 1/2" x 8 1/2"*2)
Paper capacity	100 sheets
BP-TR12 Exit Tray Unit	
Paper size	SRA3 to A6 <sup>*1</sup> (12" x 18" to 5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> "* <sup>2</sup> )

Paper size	Non offset	SRA3 to A6 <sup>*1</sup> (12" x 18" to 5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> "* <sup>2</sup> )
	Offset/staple	A3 to B5 <sup>*3</sup> (11" x 17" to 8 <sup>1</sup> / <sub>2</sub> " x 11")
	Stapleless staple	A3 to B5*4 (11" x 17", 8 1/2" x 11"*3)
Paper capacity	Non offset	500 sheets (A4, B5, A5)
		250 sheets (SRA3, A3W, SRA4, A3, B4, A6*1)
	Offset	500 sheets (A4, B5*3), 250 sheets (A3, B4)
	Staple	30 sets or 500 sheets (A4, B5*3)
		30 sets or 250 sheets (A3, B4)
	Stapleless staple	30 sets
Stapling capacity	Staple	50 sheets (A4, B5*3), 30 sheets (A3, B4)
	Stapleless staple	10 sheets* <sup>5</sup> (A4* <sup>3</sup> , B5* <sup>3</sup> ), 5 sheets* <sup>6</sup> (A3, B4)
	Manual staple	Total paper thickness 4 mm or less (40 sheets)
Staple position	Staple mode	3 locations (front, rear, or 2-point stapling)
	Stapleless staple mode	1 location (rear)
	Manual staple mode	1 location

#### **BP-FN13** Finisher

Paper size	Non offset	SRA3 to A6*1 (12" x 18" to 5 1/2" x 8 1/2"*2)
	Offset	A3W to A5 (12" x 18" to 5 1/2" x 8 1/2"*2)
	Staple	A3W to B5 (12" x 18" to 7 <sup>1</sup> / <sub>4</sub> " x 10 <sup>1</sup> / <sub>2</sub> "*1)
Paper capacity	Finisher tray (Non offset)	1,000 sheets (A4*3)
		500 sheets (SRA3, A3W, SRA4, A3, B4, A4*1, B5, A5, A6*1)
	(Offset)	1,000 sheets (A4*3)
		500 sheets (A3W, A3, B4, A4*1, B5, A5)
	(Staple)	100 sets or 1,000 sheets (A4*3)
		50 sets or 500 sheets (A3W, A3, B4, A4*1, B5)
	Top tray	250 sheets (A4, B5, A5, A6*1)
		50 sheets (SRA3, A3W, SRA4, A3, B4)
Stapling capaci	ty	50 sheets (A4, B5), 30 sheets (A3W, A3, B4)
Staple position		3 locations (front, rear, or 2-point stapling)

#### **BP-FN14** Saddle Stitch Finisher

	ate other i moner	
Paper size	Non offset	SRA3 to A6*1 (12" x 18" to 5 1/2" x 8 1/2"*2)
	Offset	A3W to A5 (12" x 18" to 5 1/2" x 8 1/2"*2)
	Staple	A3W to B5 (12" x 18" to 7 1/4" x 10 1/2"*1)
Paper capacity	Finisher tray (Non offset)	1,000 sheets (A4*3)
		500 sheets (SRA3, A3W, SRA4, A3, B4, A4*1, B5, A5, A6*1
	(Offset)	1,000 sheets (A4*3)
		500 sheets (A3W, A3, B4, A4*1, B5, A5)
	(Staple)	100 sets or 1,000 sheets (A4*3)
		50 sets or 500 sheets (A3W, A3, B4, A4*1, B5)
	Top tray	250 sheets (A4, B5, A5, A6*1)
		50 sheets (SRA3, A3W, SRA4, A3, B4)
	Saddle stitch tray	7 sets of 11–15 sheets, 10 sets of 6–10 sheets,
		20 sets of 1–5 sheets
Stapling capaci	ity	50 sheets (A4, B5), 30 sheets (A3W, A3, B4)
Staple position		3 locations (front, rear, or 2-point stapling)

#### **BP-FN15** Finisher

-		
Paper size	Non offset	SRA3 to A6*1 (12" x 18" to 5 1/2" x 8 1/2"*2)
	Offset/staple	A3 to B5*3 (11" x 17" to 8 1/2" x 11")
	Stapleless staple	A3, A4*3 (11" x 17", 8 1/2" x 11"*3)
Paper capacity	Finisher tray (Non offset)	3,000 sheets (A4*³, B5*³)
		1,500 sheets (SRA3, A3W, SRA4, A3, B4, A4*1, B5*1, A5)
		750 sheets (A6*1)
	(Offset)	3,000 sheets (A4*³, B5*³)
		1,500 sheets (A3, B4, A4*1)
	(Staple)	200 sets or 3,000 sheets (A4*3, B5*3)
		100 sets or 1,500 sheets (A3, B4, A4*1)
	(Stapleless staple)	200 sets (A4*3), 100 sets (A3)
	Top tray	250 sheets (A4*3, B5*3, A5)
		125 sheets (SRA3, A3W, SRA4, A3, B4, A4*1, B5*1)
Stapling capacity	Staple	65 sheets (A4*3, B5*3), 30 sheets (A3, B4, A4*1)
	Stapleless staple	10 sheets*5 (A4*3), 5 sheets*6 (A3)
	Manual staple	Total paper thickness 9 mm or less (65 sheets)
Staple position	Staple mode	3 locations (front, rear, or 2-point stapling)
	Stapleless staple mode	1 location (rear)
	Manual staple mode	1 location

#### **BP-FN16 Saddle Stitch Finisher**

Paper size	Non offset	SRA3 to A6*1 (12" x 18" to 5 $^{1}/_{2}$ " x 8 $^{1}/_{2}$ "*2)
	Offset/staple	A3 to B5*3 (11" x 17" to 8 1/2" x 11")
	Stapleless staple	A3, A4*3 (11" x 17", 8 1/2" x 11"*3)
Paper capacity	Finisher tray (Non offset)	3,000 sheets (A4*3, B5*3)
		1,500 sheets (SRA3, A3W, SRA4, A3, B4, A4*1, B5*1, A5)
		750 sheets (A6*1)
	(Offset)	3,000 sheets (A4*3, B5*3)
		1,500 sheets (A3, B4, A4*1)
	(Staple)	200 sets or 3,000 sheets (A4*3, B5*3)
		100 sets or 1,500 sheets (A3, B4, A4*1)
	(Stapleless staple)	200 sets (A4*3), 100 sets (A3)
	Top tray	250 sheets (A4*3, B5*3, A5)
		125 sheets (SRA3, A3W, SRA4, A3, B4, A4*1, B5*1)
	Saddle stitch tray	10 sets of 11–20 sheets, 15 sets of 6–10 sheets,
		25 sets of 1–5 sheets
Stapling capacity	Staple	65 sheets (A4*3, B5*3), 30 sheets (A3, B4, A4*1)
	Stapleless staple	10 sheets*5 (A4*3), 5 sheets*6 (A3)
	Manual staple	Total paper thickness 9 mm or less (65 sheets)
Staple position	Staple mode	3 locations (front, rear, or 2-point stapling)
	Stapleless staple mode	1 location (rear)
	Manual staple mode	1 location

#### **Punch Modules**

Model name	For BP-FN11	MX-PN14B*7	MX-PN14C*8	MX-PN14D
	For BP-FN13/FN14	MX-PN15B*7	MX-PN15C*8	MX-PN15D
	For BP-FN15/FN16	MX-PN16B*7	MX-PN16C*8	MX-PN16D
Number of holes		2 or 3	2 or 4	4 (wide)
Paper weight			55 to 256 g/m <sup>2</sup> *9	

#### **BP-FD10** Folding Unit

	-	
Folding mode		Z-fold, C-fold, Accordion-fold, Half-fold
Paper size	Z-/Half-fold	A3, B4, A4*1
		(11" x 17", 8 <sup>1</sup> / <sub>2</sub> " x 14", 8 <sup>1</sup> / <sub>2</sub> " x 13 <sup>2</sup> / <sub>5</sub> ", 8 <sup>1</sup> / <sub>2</sub> " x 11"*1)
	C-/Accordion-fold	A3, A4*1
		(11" x 17", 8 <sup>1</sup> / <sub>2</sub> " x 14", 8 <sup>1</sup> / <sub>2</sub> " x 13 <sup>2</sup> / <sub>5</sub> ", 8 <sup>1</sup> / <sub>2</sub> " x 11"*1)
Paper capacity	Not folded	200 sheets
	Folded	20 sheets <sup>*10</sup>

#### BP-DE12 Stand with 550-Sheet Paper Drawer

Paper size	SRA3 to A5 <sup>*1</sup> (12" x 18" to 5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> "* <sup>2</sup> )
Paper capacity	550 sheets

#### **BP-DE13** Stand with 2 x 550-Sheet Paper Drawer

Paper size Upper and lower tray	SRA3 to A5 <sup>*1</sup> (12" x 18" to 5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> "* <sup>2</sup> )
Paper capacity Upper and lower tray	550 sheets each

#### **BP-DE14** Stand with 3 x 550-Sheet Paper Drawer

Paper size	Upper/middle/lower tray	SRA3 to A5 <sup>*1</sup> (12" x 18" to 5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> "* <sup>2</sup> )
Paper capacity	Upper/middle/lower tray	550 sheets each

#### **BP-DE15** Stand with 550 + 2,100-Sheet Paper Drawer

	Paper size	Upper tray	SRA3 to A5 <sup>*1</sup> (12" x 18" to 5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> "* <sup>2</sup> )
		Lower right tray	A4*3, B5*3 (8 1/2" x 11"*3)
		Lower left tray	A4*3 (8 1/2" x 11"*3)
	Paper capacity	Upper tray	550 sheets
		Lower right tray	900 sheets
		Lower left tray	1,200 sheets

#### **BP-LC10** Large Capacity Tray

Paper size A <sup>2</sup>	4*3, B5*3 (8 1/2" x 11"*3)
Paper capacity 3,	,000 sheets

#### MX-LT10 Long Paper Feeding Tray

Paper size	Width	90 to 320 mm
	Length	458 to 1,300 mm
Paper capacity		1 sheet

Note: All specifications relating to paper capacity refer to 80  $g/m^2\,\text{paper}.$ 

\*1: Short-edge feeding. \*2: Short-edge feeding for 7 <sup>1</sup>/<sub>4</sub>" x 10 <sup>1</sup>/<sub>2</sub>" and 5 <sup>1</sup>/<sub>2</sub>" x 8 <sup>1</sup>/<sub>2</sub>" paper.
\*3: Long-edge feeding. \*4: Long-edge feeding for A4 and B5 paper. \*5: Guaranteed stapleable weight is up to 64 g/m<sup>2</sup> (8 sheets up to 81.4 g/m<sup>2</sup> and 6 sheets up to 105 g/m<sup>2</sup>).
\*6: Guaranteed stapleable weight is up to 64 g/m<sup>2</sup> (4 sheets up to 81.4 g/m<sup>3</sup> and 3 sheets up to 105 g/m<sup>2</sup>).
\*7: Accepts North American paper sizes. \*8: Accepts ISO-standard paper sizes. \*9: Guaranteed punchable weight is 60 to 128 g/m<sup>2</sup>. \*10: When used with a finisher, 30 Z- or half-folded sheets (A3 and B4). These sheets are ejected from the finisher.

### **SPECIFICATIONS**

General	
Type Engine speed	Desktop A4 (8 ½" x 11")*1: Max. 36 ppm A3 (11" x 17"): Max. 18 ppm
	SRA3: Max. 16 ppm
Control panel display	10.1-inch colour LCD touchscreen
Paper size	Max. SRA3 (12" x 18"), min. A6 (5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> ")* <sup>2</sup>
Paper capacity	Standard: 650 sheets
(80 g/m <sup>2</sup> )	(550-sheet tray and 100-sheet bypass tray)
	Maximum: 6,300 sheets
	(650 sheets & optional 550 + 2,100-sheet tray and 3,000-sheet tray)
Paper weight	Tray: 60 g/m² to 300 g/m² (16 lbs bond to 110 lbs cover)
	Bypass tray: 55 g/m <sup>2</sup> to 300 g/m <sup>2</sup>
	(13 lbs bond to 110 lbs cover)
Warm-up time* <sup>3</sup>	16 sec.*4
Memory	Standard: 5 GB (copy/print shared) 256 GB SSD*5
	Option: 512 GB*5*6
Power requirements	Rated local AC voltage ±10%, 50/60 Hz
Power consumption	Max. 1.84 kW (220 V to 240 V)
Dimensions (W x D x H)*7	$608 \times 653 \times 829 \text{ mm} (23  {}^{15}/_{16}" \times 25  {}^{23}/_{32}" \times 32  {}^{41}/_{64}")$
Weight (approx.)* <sup>8</sup>	79 kg (174.2 lbs)

Max. A3 (11" x 17")

Max. 9,999 copies

Scan (colour): 600 x 600 dpi

(depending on copy mode)

Equivalent to 256 levels

Scan (B/W): 600 x 600 dpi, 600 x 400 dpi

Print (B/W): 1,200 x 1,200 dpi, 600 x 600 dpi, 9,600 (equivalent) x 600 dpi (depending on copy mode)

Metric: 10 ratios (5R/5E), inch: 8 ratios (4R/4E)

Print (colour): 600 x 600 dpi, 9,600 (equivalent) x 600 dpi

25% to 400% (25% to 200% using RSPF) in 1% increments

B/W: 4.6 sec.

Colour: 6.5 sec.

### **Document Filing**


Document filing capacity <sup>*14</sup> Stored jobs <sup>*15</sup> Storage folders	Main and custom folders: 20,000 pages or 3,000 files Quick file folder: 10,000 pages or 1,000 files Copy, print, scan, fax Quick file folder, main folder, custom folder (max. 1,000 folders)
Printer	
Resolution	1,200 x 1,200 dpi, 600 x 600 dpi, 9,600 (equivalent) x 600 dpi
Interface	USB 2.0 (host, high-speed), USB 3.0 (host, super speed),
	10Base-T/100Base-TX/1000Base-T,
Supported OS	wireless LAN (IEEE 802.11 a/b/g/n/ac)* <sup>16</sup> Windows Server 2012, Windows Server 2012 R2,
Supported US	Windows Server 2012, Windows Server 2012 K2, Windows Server 2016, Windows Server 2019,
	Windows Server 2022, Windows 8.1, Windows 10, Windows 11,
	Mac OS 10.10, 10.11, 10.12, 10.13, 10.14, 10.15, 11, 12
Network protocols	TCP/IP
Printing protocols	LPR, Raw TCP (port 9100), POP3 (email printing), HTTP,
	FTP for downloading print files, IPP, IPP Everywhere, SMB, WSD
PDI	PCL 6 emulation, Adobe PostScript 3
Available fonts	80 fonts for PCL, 139 fonts for Adobe PostScript 3

#### Facsimile (requires optional BP-FX11)

Compression method Communication protocol Transmission time Modem speed Transmission resolution	MH/MR/MMR/JBIG Super G3/G3 Less than 3 seconds <sup>*17</sup> 33,600 bps to 2,400 bps with automatic fallback From Standard (203.2 x 97.8 dpi) to Ultra Fine (406.4 x 391 dpi)
Recording size	A3 to A5 (11" x 17" to 5 <sup>1</sup> / <sub>2</sub> " x 8 <sup>1</sup> / <sub>2</sub> ")
Memory	4 GB (built-in)
Greyscale levels	Equivalent to 256 levels

Design and specifications are subject to change without prior notice

 Microsoft Teams, Windows, and Windows Server are trademarks of the Microsoft group of windows, and windows, and windows server are trademarks of the microsoft group of companies. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. Wi-Fi Protected Setup is a trademark of Wi-Fi Alliance®. PCL is a registered trademark of Hewlett-Packard Company. Adobe and PostScript are either registered trademarks or trademarks of Adobe in the US and/or other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners.

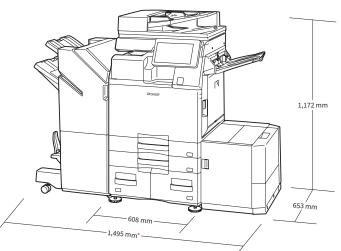

\* 1,648 mm when finisher tray and exit tray are extended.

Shown with optional equipment.

Distributed by:

Gradation Zoom range Preset copy ratios

Copier

Resolution

Original paper size

First copy time\*

Continuous copy

#### Scanner

Scan method	Push scan (via control panel)
	Pull scan (TWAIN-compliant application)
Scan speed <sup>*10</sup>	Colour & B/W: Max. 80 originals/min.
Resolution	Push scan: 100, 150, 200, 300, 400, 600 dpi
	Pull scan: 75, 100, 150, 200, 300, 400, 600 dpi
	50 dpi to 9,600 dpi via user setting*11
File formats	TIFF, PDF, PDF/A-1a, PDF/A-1b, encrypted PDF, XPS,
	compact PDF <sup>*12</sup> , JPEG <sup>*12</sup> , searchable PDF, OOXML
	(pptx, xlsx, docx), text (TXT [UTF-8]), rich text (RTF)
Scan destinations	Email/desktop*13/FTP server/network folder (SMB)/
	USB drive/local drive

- Long-edge feeding.
- \*2: Only short-edge feeding can be used with A6 and 5 1/2" x 8 1/2" paper. \*3: In a standard measurement environment. May vary depending on operating conditions and
- environment \*4: When starting the MFP via the power button. 27 seconds when starting via the main power
- switch. Storage capacity depends on procurement and sourcing status.
- \*6: Replacing the standard-equipped SSD with the optional BP-SD10 increases storage capacity to . 512 GB.
- \*7: Including protuberances.
  \*8: Including the Exit Tray Cabinet.
- \*9. Long-edge feeding of A4 (8 <sup>1</sup>/<sub>2</sub>" x 11") sheets from 1st paper tray, using document glass, without Auto Colour Selection and Auto Colour mode, MFP in fully ready condition. May vary depending on operating conditions and environment. \*10: Based on Sharp's A4 standard chart, using document feeder, long-edge feeding, and one-sided
- scanning. Using factory default settings with Auto Colour Selection off. Scan speed will vary depending on the type of document and the scan settings.
- \*11: Resolution will vary depending on the size of the scanned area \*12: Colour/greyscale only.
- \*13: Requires Network Scanner Tool Lite.
- \*14: Storage capacity will vary depending on the type of document and the scan settings. \*15: Some features require optional equipment.
- \*16: In some countries/regions, the optional BP-EB10 is required. Availability of this option varies by country/region. \*17: Based on Sharp's standard chart with approx. 700 characters (A4 or 8  $^1\!/^2$  x 11" long-edge
- feeding) at standard resolution in Super G3 mode, 33,600 bps, JBIG compression.